

Extractor hood 700-W1600



Description

This extractor hood with a maximum air throughput of 1400 m³/h is fitted with 3 filters and is intended for wall mounting. The LED lighting ensures a well-lit working area around your cooker, griddle, and so on.

Features

- | | |
|----------------------------|------------------------------|
| • Operating mode: | Exhaust air |
| • Assembly type: | Wall |
| • Max. air throughput: | 1400 m³/h |
| • Flame protection filter: | Type A |
| • Number of filters: | 3 |
| • Material filter: | Stainless steel |
| • Protection class: | IP54 |
| • Lighting: | LED |
| | Non-dazzle installation |
| | With grease protection cover |
| • Lamps (number + watt): | 1 x 8 W |
| • Available on request: | Other sizes |
| | Hood with depth of 1,100 mm |
| | Ceiling hood |
| • Including: | - |
| • Power load: | 0,008 kW 230 V 50-60 Hz |
| • Material: | Stainless steel |

▶ Continue on the next page

▶ Extractor hood for wall mounting

▶ Design

✓ Depth: 700 mm


✓ Width: 1,600 mm

▶ Max. air throughput: 1400 m³/h



▶ 3 flame protection filters

✓ Type A

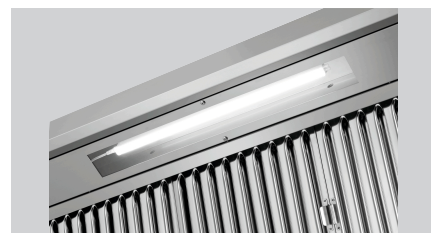

▶ LED lighting

✓ 1 x 8 W



▶ Welded-on grease collection channel with discharge tap

Extractor hood 700-W1600

- Important information:
 - Properties:
 - Size:
 - Weight:
- Filter carrier
Welded-on grease collection channel with discharge tap
W 1,600 x D 700 x H 450 mm
44 kg



Extractor hood 700-W1600

Add on Products

Intensive power cleaner F1L, set of 2



- Order quantity unit: 1 box (2 bottles)
- Content: 2 x 1 litre
- Ph level: 14
- HACCP compliant: Yes
- Chlorine-free: Yes
- Phosphate-free: Yes
- Including: 1 spray head

Code-No. 173080
GTIN 4015613731933