

Extractor hood 700M-W1600



- ▶ Extractor hood with integrated motor
- ✓ For wall mounting

- ▶ Design
- ✓ Depth: 700 mm
- ✓ Width: 1,600 mm



- ▶ Motor power: 145 W
- ▶ Max. air throughput: 1400 m³/h




- ▶ 3 flame protection filters
- ✓ Type A

Description

With its integrated motor and 3 filters, the extractor hood offers high suction power over a large surface area. The stainless steel design with a motor power of 145 watts and a maximum air throughput of 1400 m³/h is intended for wall mounting and fitted with LED lighting.

Features

- Number of fan motors/exhaust air outputs: 1
- Motor output: 145 W
- Fan regulation: Via an external controller
- Cut-out for the motor: 233 x 200 mm
- Operating mode: Exhaust air
- Assembly type: Wall
- Max. air throughput: 1400 m³/h
- Flame protection filter: Type A
- Number of filters: 3
- Material filter: Stainless steel
- Protection class: IP54
- Lighting: LED
- Lamps (number + watt): 1 x 8 W
- Available on request: Other sizes
- Hood with depth of 1,100 mm

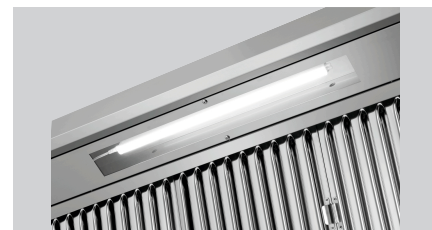

- ▶ LED lighting
- ✓ 1 x 8 W



- ▶ Can only be placed into operation with an additional controller
- ✓ Speed controller 1-2200

▶ Continue on the next page

Extractor hood 700M-W1600

- Available on request:
- Including:
- Power load: 0,153 kW | 230 V | 50-60 Hz
- Material: Stainless steel
- Important information: Can only be commissioned with an additional controller
- Properties: Filter carrier
- Size: Welded-on grease collection channel with discharge tap
- Weight: W 1,600 x D 700 x H 450 mm
- Weight: 51 kg



Extractor hood 700M-W1600

Add on Products

Intensive power cleaner F1L, set of 2



- Order quantity unit: 1 box (2 bottles)
- Content: 2 x 1 litre
- Ph level: 14
- HACCP compliant: Yes
- Chlorine-free: Yes
- Phosphate-free: Yes
- Including: 1 spray head

Code-No. 173080
GTIN 4015613731933